


1-needle, Lockstitch Buttonholing Machine

LBH-780 SERIES

SMOOTH OPERATION CONTRIBUTES TO
HIGH-QUALITY FINISHED BUTTONHOLES
AND A HIGHER DEGREE OF EFFICIENCY.

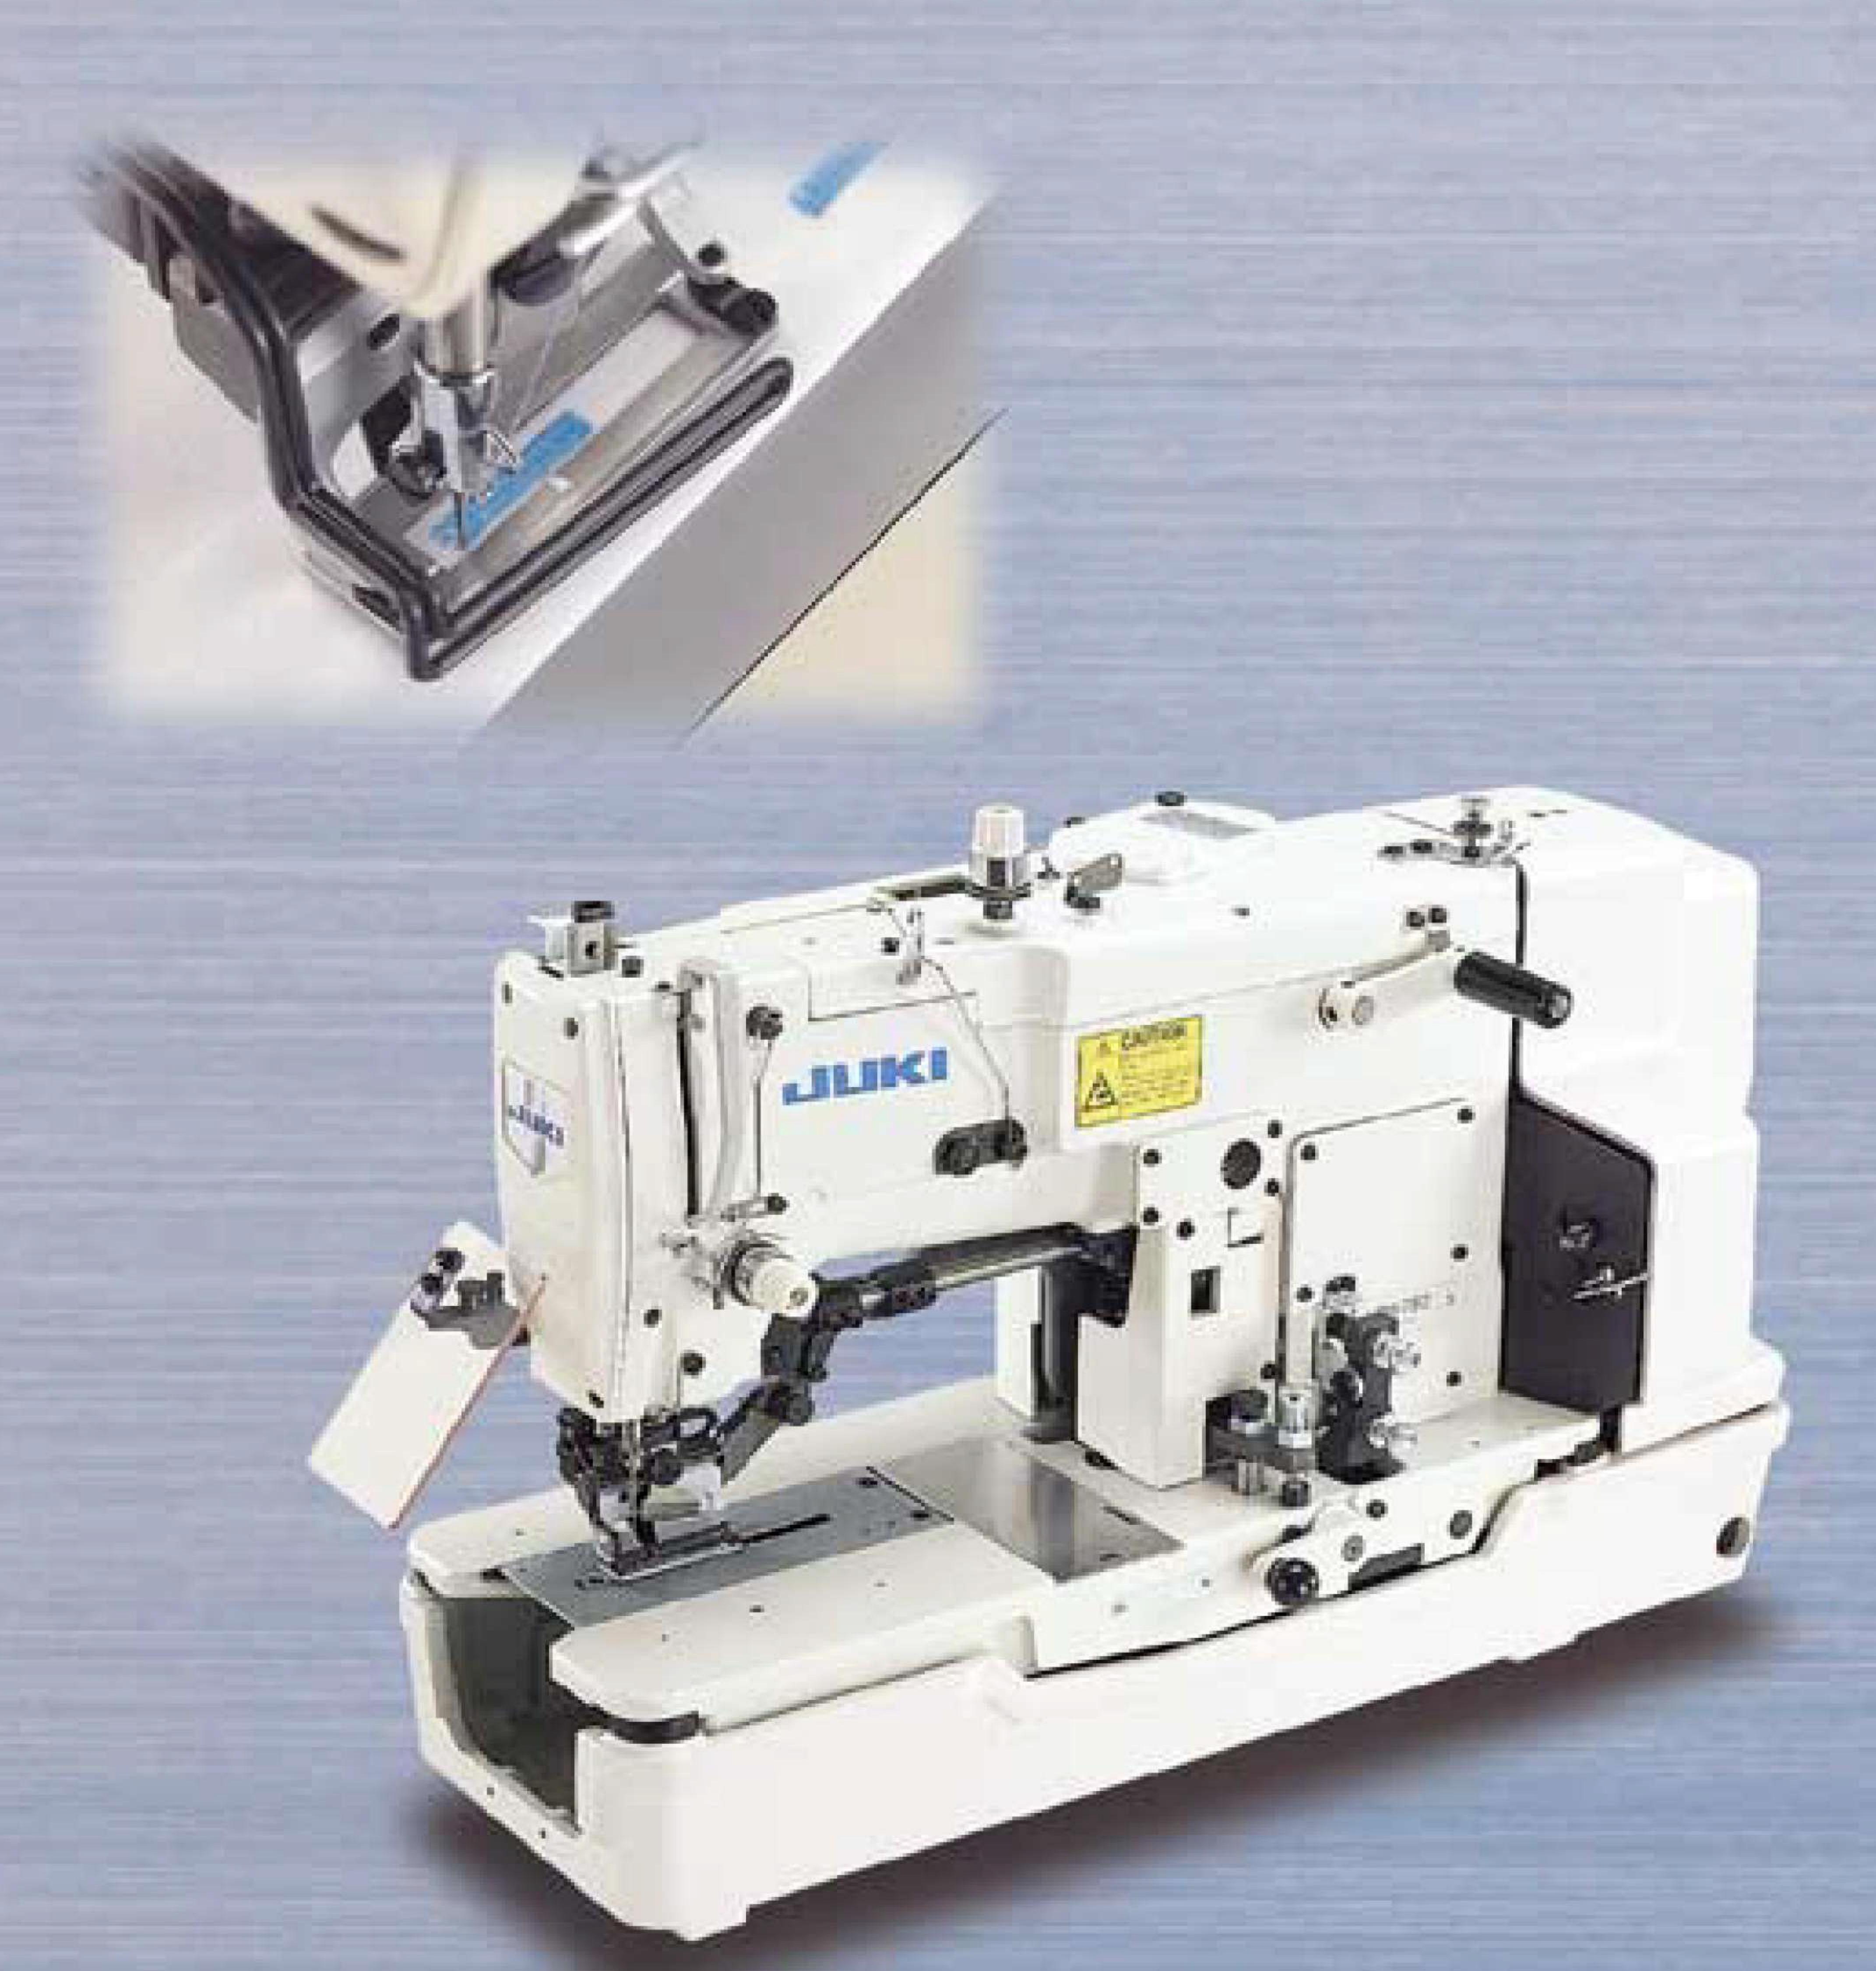

LBH-780 SERIES


At the very least, a good buttonholing machine should finish seams of consistent quality and be widely adaptable to many different kinds of materials and seam specifications. The LBH-780 series buttonholing machines respond to these needs and help reduce operator fatigue, thereby finishing high-quality buttonholes with a higher degree of efficiency.

- The buttonholing position can be easily adjusted. This further enhances ease of operation.
 - A newly introduced mechanism in the needle thread trimmer prevents interference with the positioning of buttonholes. The shape of the face plate is designed to provide sufficient clearance around the needle entry position. As a result, ease of operation is further improved.
- The work clamp can be lifted as high as 12mm. The machine is capable of sewing heavy-weight materials such as bulky knits. The maximum lift of the work clamp is 12mm, enabling the machine to make high-quality buttonholes in heavy-weight materials.
- Work clamp can be easily lifted. This helps to substantially reduce operator fatigue. The pressure required to depress the start pedal and lifter pedal has been reduced. This helps to dramatically reduce operator fatigue.
- The knife mechanism and stop-motion mechanism produce less noise when they actuate, thus contributing to a more comfortable working environment. Thanks to the simple design of the stop-motion mechanism and unique knife mechanism, the machine operates with low noise. The machine starts, decelerates and stops smoothly.





 This needle entry point can visually checked. This permits easy positioning of buttonholes.

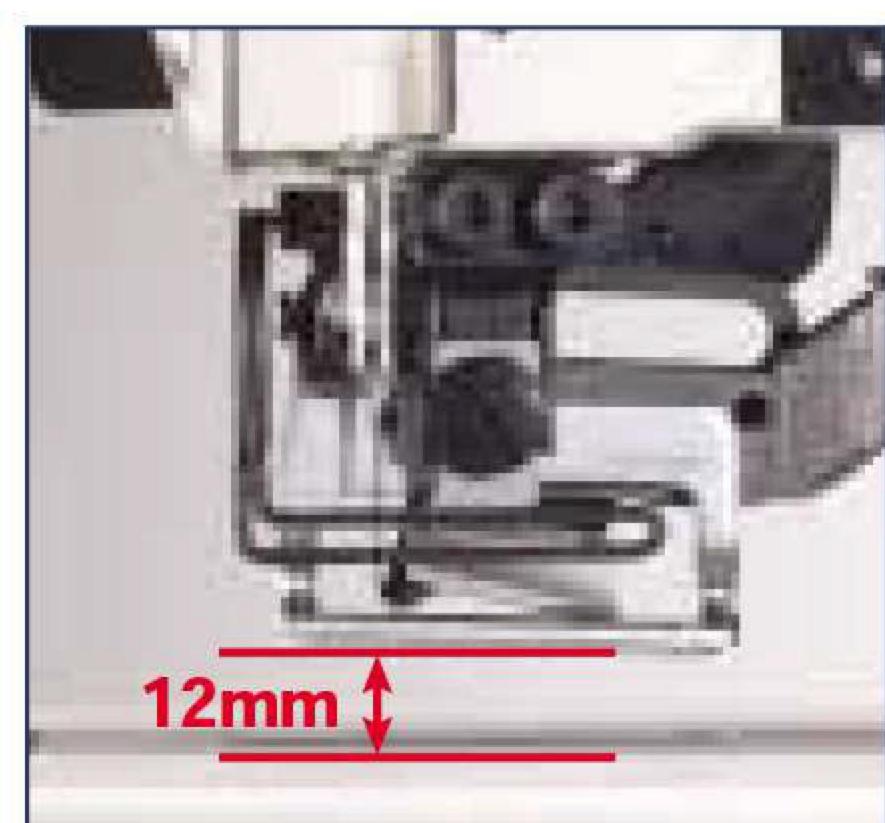

 The lift of the work clamp is as high as 12mm.

LBH-780NV

(for double-stitching with gimp)

LBH-780NB

(for double-stitching with gimp and gimp cutter)

- The machine neatly tucks in tetron gimps with consistency. Thanks to the improved locus of the gimp guide, the machine is flexibly adaptable to changes in the types of gimps to be used, easily switching operation to accommodate one to three pieces of tetron thread, or one sewing thread and one span thread. In addition, the gimp guide is designed so that it shifts vertically. This means that the relation between the needle and the gimp guide is uniform even if the material thickness varies, thus allowing the machine to tuck in gimps with consistency.
- A machine is designed for sewing soft-to-the-touch circular bartacks. It has been developed to sew circular bartacks on ladies' wear, a process that requires a very delicate finish.
- The machine ensures stable stitching performance on multi-layered portion of the material. The improved work clamp and its fulcrumsecurely hold multi-layered portions of a heavy-weight material, thereby preventing sewing troubles such as uneven material feed, slip-off of gimp and needle breakage. This allows the machine to perform buttonholing with consistency.
- The gimp cutter dramatically promotes lobor-saving. (NB type)
 The length of remaining gimp after its trimming is only about 2mm.
 This eliminates the thread cropping procedure in the after-process, thereby increasing productivity. The distance between the gimp-cutting scissors and the needle scarcely changes when sewing multi-layered portions of the material, thus ensuring consistent gimp-cutting at any occasion.




LBH-783NB




LBH-782NB

A new LBH series model has been designed for a round-type of bartacking for ladies' wear with a soft, femine touch. With this new model, finished products provide a soft feeling.

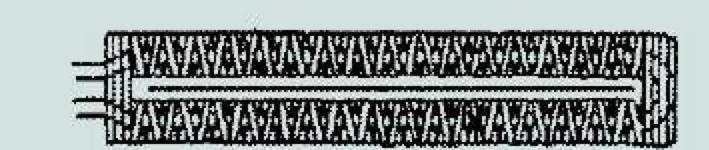

Square-type bartacking

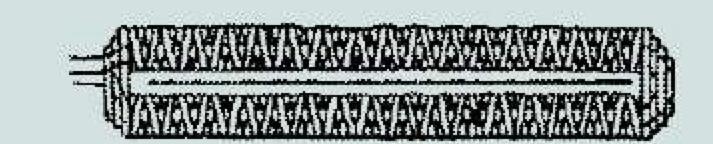

Round-type bartacking

LIST OF THE SUBCLASS MACHINES ACCORDING TO THEIR APPLICATIONS

Subclass models	Application	A BANGARAN COLLAND TO B	Buttonholing size (in mm)								
			Α	6.4 ~ 19.1	Α	6.4 ~ 25.4	Α	6.4 ~ 31.8	Α	12.7 ~ 38.1	
			В	2.5 ~ 4.0	В	2.5 ~ 5.0	В	2.5 ~ 5.0	В	2.5 ~ 5.0	
		Stitch formation	С	Max. 22	С	Max. 33	С	Max. 40	С	Max. 47	
Standard type	Men's shirts, blouses, working wear, ladies' wear		LBH-781U		LBH-782U		LBH-783U		LBH-784U		
K type: For Knits	Knitting fablic underwear, knit products including sweaters, cardigans and tights, medium-weight material including working wear.		LBH-781KU		LBH-782KU		LBH-783KU		LBH-784KU		
NV type: Double- stitching with gimp	Sweater, polo shirts, knits, and jersey wear made of the materials which need to be sewn with especially durable stitches.					* 1 LBH-782NV LBH-782NV1		* 2 LBH-783NV LBH-783NV1		LBH-784NV LBH-784NV1	
NB type: Double- stitching with gimp and gimp cutter	Same with the application of the NV type models. NB type model is equipped with the automatic gimp cutter.					* 3 LBH-782NB LBH-782NB1		* 4 LBH-783NB LBH-783NB1		LBH-784NB LBH-784NB1	

OPTIONS

Model	Part No.	Description	Feature		
Q060	MAQ-060000A0	Men's shirts	Spacer for first bottonholes This is a ruler to be used to set the first buttonhole at a predetermined position		
Q061	MAQ-061000A0	Ladies' blouses	in accordance with the shape of the collar. Adjustable regardless of the dimensions and shape of collars.		
Q066	MAQ-066000A0	Spacer for buttonholes on top- center plaits Buttonholes are positioned at right angles to the top-center plaits.	This is a ruler to be used for sewing lateral buttonholes in the process of buttonholing top-center plaits. The ruler is provided with four positioning pointers on the right and left. Each of the pointers can be shifted with a single motion.		
SK-1		Pneumatic knife driving unit	The SK-1 pneumatic knife driving unit cuts the material by tapping a flat knife and nylon plate on the material. This prevents the tensing-up of texture yarns that so often occurs when sewing glossy synthetic materials.		
AO17	19.————————————————————————————————————	Automatic single-pedal unit			








Q066



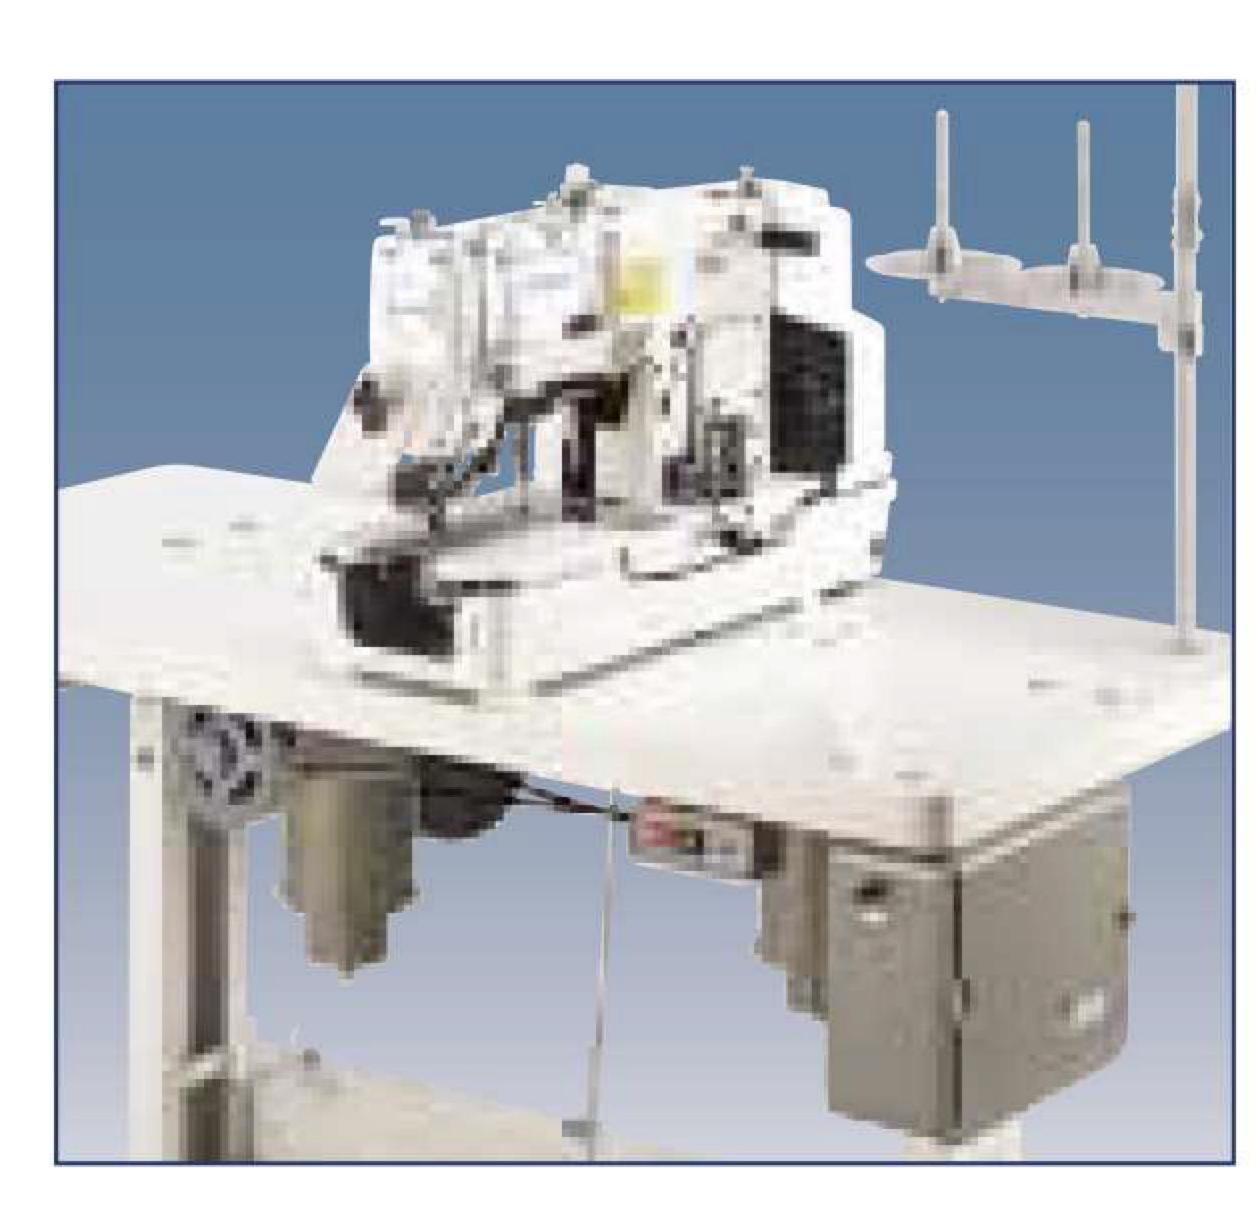


SPECIFICATIONS

Model name	LBH-780	LBH-780				
Application	Buttonholing for ordinary cloth, knit, etc.	For double-stitching with gimp	For double-stitching with gimp and gimp cutter			
Sewing speed	3,600rpm	Max. 3,300rpm, Normal 3,000rpm				
Needle bar stroke	34.6mm					
Max. lift of the work clamp	12r	11.5mm				
Max. thickness of material that can be used	4mm (with the work clamp lowered)					
Number of stitches	54~345 (by gear-change method)					
Length of buttonholes	6.4~38.1mm	9.5 ~ 38.1mm	11.5~38.1mm			
Needle	DP×5 #11J, For JE: 134 Nm75					
Hook	DP type, automatic-lubricating full-rotary hook					
Deceleration method	Belt-shifting method					
Lubrication	Automatic					
Lubricating oil	JUKI New Defrix Oil No.1 (equivalent to ISO VG7)					
Motor	300W general-purpose motor (A 250W general-purpose motor can be used when the machine is used at a sewing speed of 3,100rpm or less.)					
Weight of the machine head	40kg					


WHEN YOU PLACE ORDERS

Please note when placing orders, that the model name should be written as follows:


LBH-780 Series

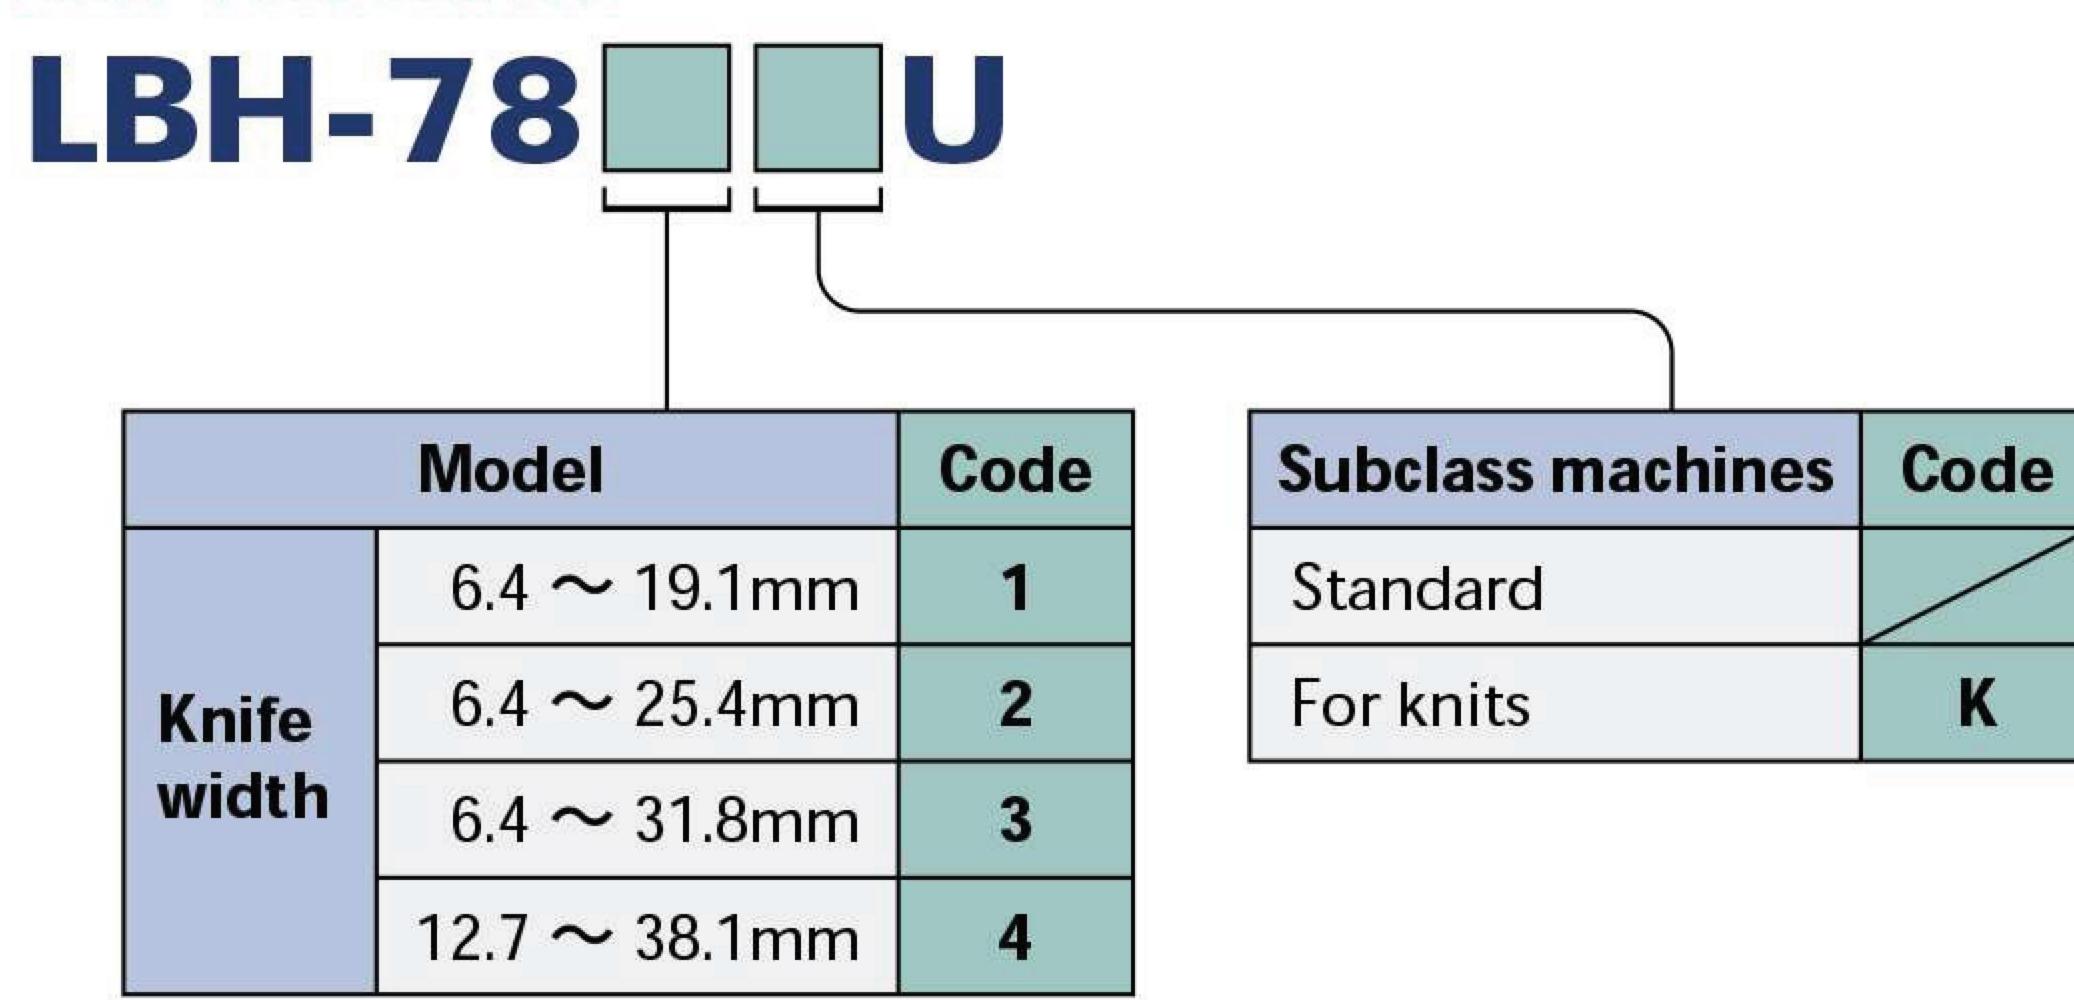

NV Type

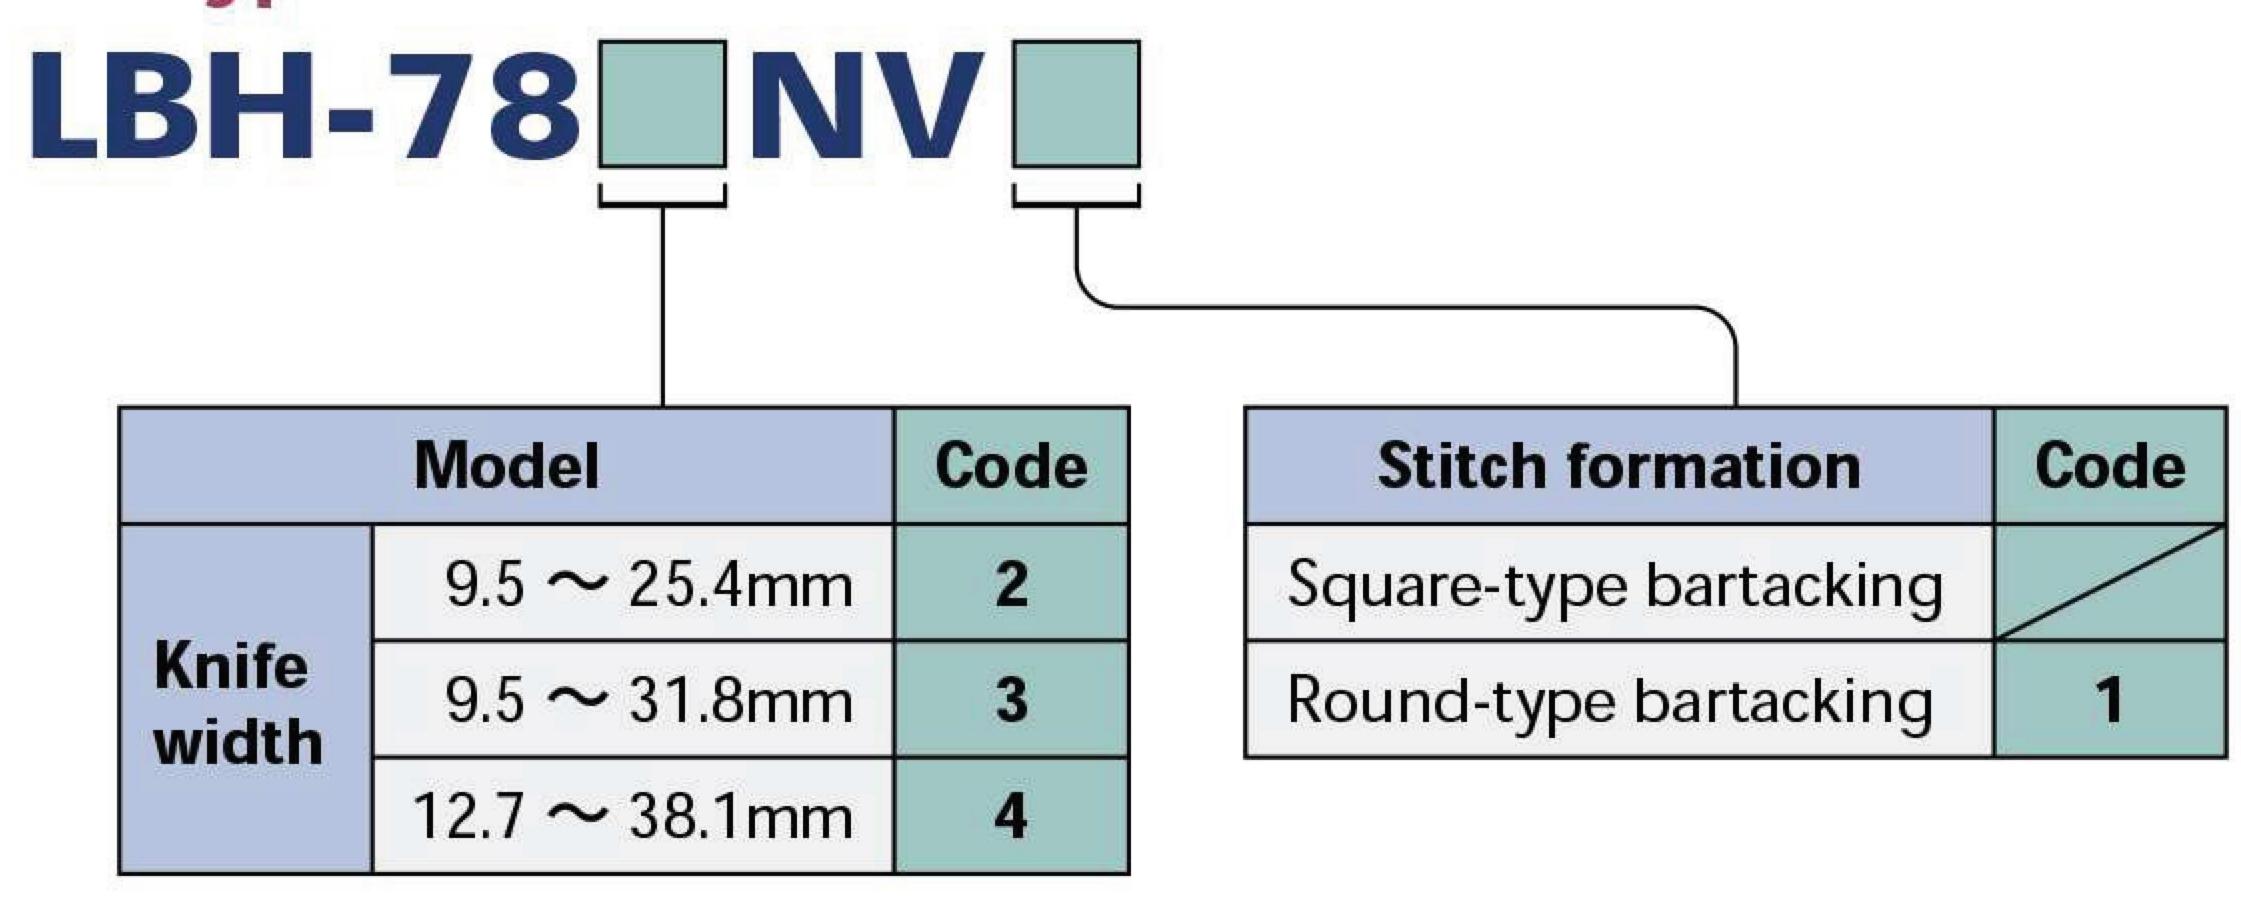

NB Type

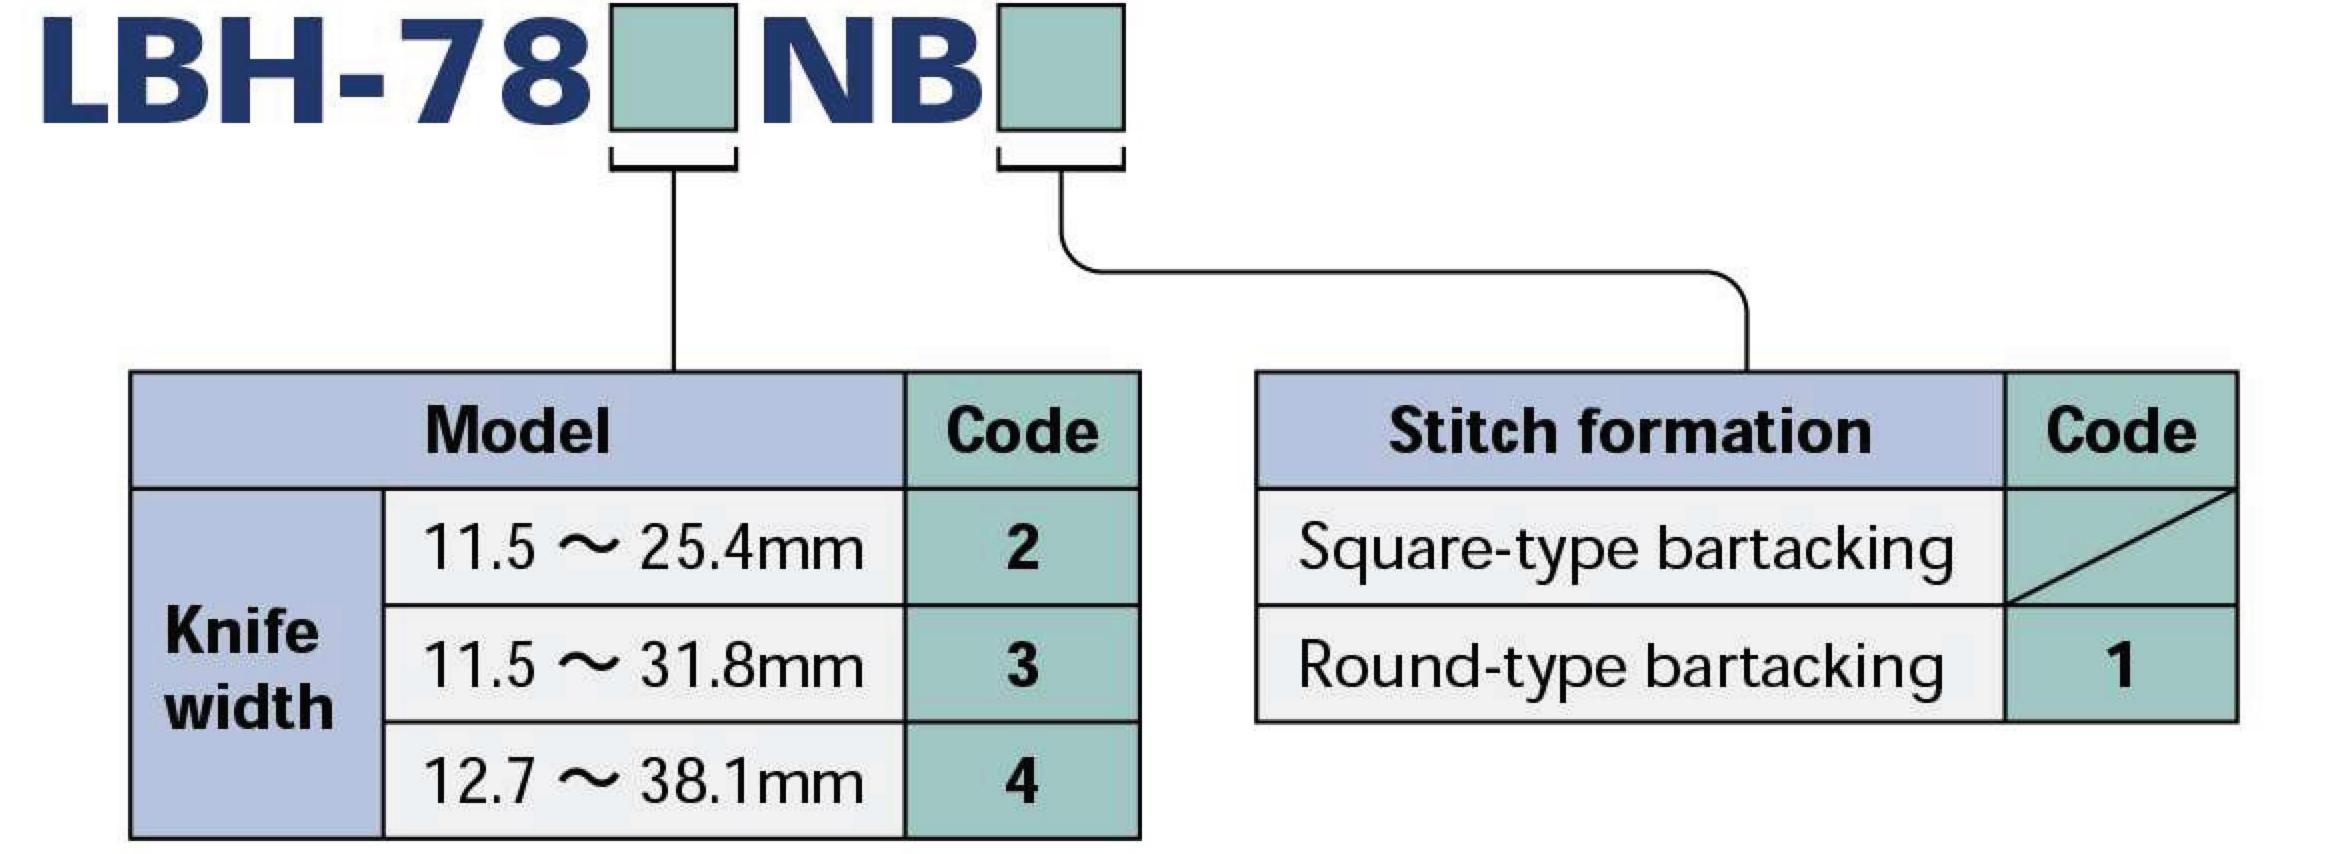



JUKI CORPORATION HEAD OFFICE

The environmental management system to promote and conduct The technological and technical research, the development and design of the products in which the environmental impact is considered,

②the conservation of the energy and resources, and the recycling, in the research, development, design, distribution, sale and maintenance service of the industrial sewing machines, household sewing machines and industrial-use robots, etc. and in the purchase, distribution and sale of the household commodities including the healthcare products.

To order, please contact your nearest JUKI distributor.

