




## BRC- T9270D/9280D

品名：机电一体曲腕机  
Direct Drive Feed-off-the Arm Machine

特性：适应范围广，节能高效  
Wide range of application, power saving and high efficiency

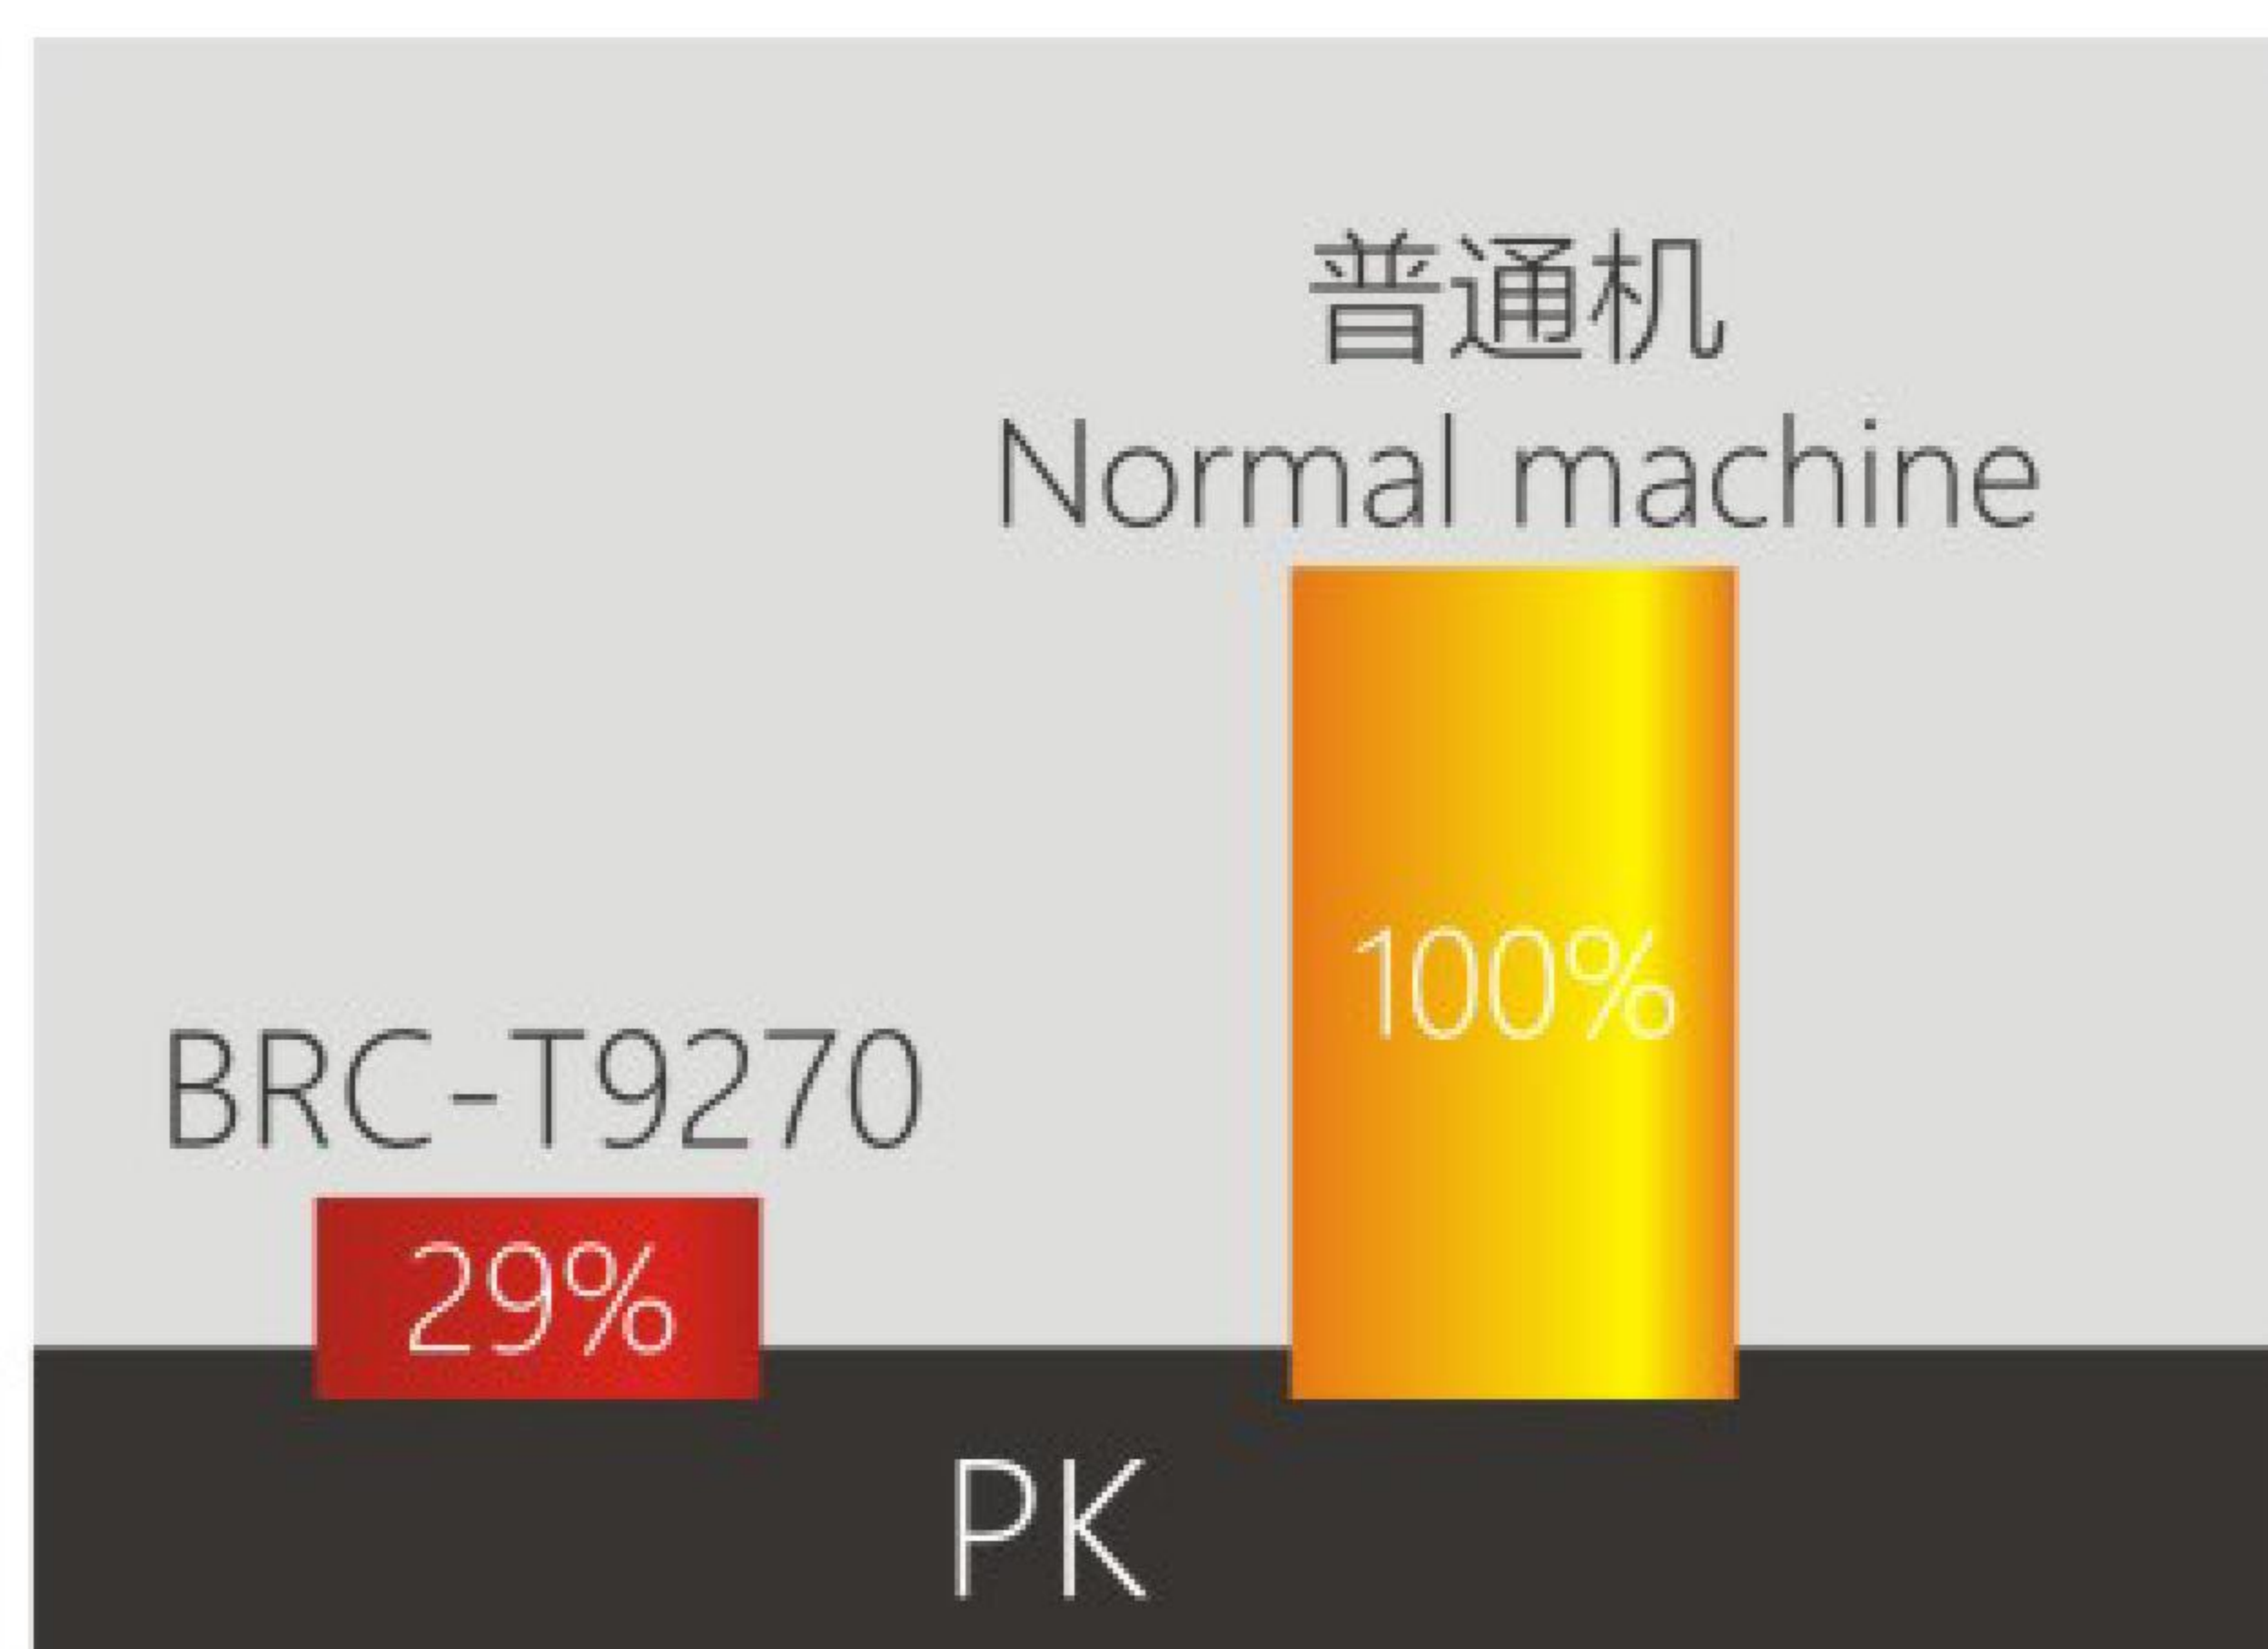

节能高达71%  
Power saving 71%



悬臂筒形设计，适用范围广  
Cantilever tube design, wide range of application

### 技术参数 Specification

								A	M	H	HH			NW/GW
				(mm)	(mm)	(mm)	(mm)					(S.p.m)	(mm)	(kg)
BRC-T9270D-12-Q	1/4, 3/16	TV×64 12#	2	4	3.5	8	●					3500	685×535×475	61.5/68.5
BRC-T9270D-12-2PL-Q	1/4, 3/16	TV×64 12#	2	4	3.5	8	●					3500	685×535×475	61.5/68.5
BRC-T9270D-12-2PS-Q	1/4, 3/16	TV×64 12#	2	4	3.5	8	●					3500	685×535×475	61.5/68.5
BRC-T9270D-12-2PL-Q	3/16	TV×64 12#	2	4	4.2	8	●					3500	685×535×475	61.5/68.5
BRC-T9270D-13-Q	1/8	TV×64 12#	3	6	3.5	8	●					3500	685×535×475	61.5/68.5
BRC-T9270D-13-2PL-Q	1/8	TV×64 12#	3	6	3.5	8	●					3500	685×535×475	61.5/68.5
BRC-T9270D-22-Q	1/4, 3/16	TV×64 14#	2	4	3.5	8		●				3500	685×535×475	61.5/68.5
BRC-T9280D-53-Q	1/8	TV×5 21#	3	6	4.2	10			●			3000	685×535×475	61.5/68.5
BRC-T9280D-73-2PL-Q	1/8	TV×5 21#	3	6	4.2	10				●		3000	685×535×475	61.5/68.5
BRC-T9280D-73-PL-Q	1/8	TV×5 21#	3	6	4.2	10				●		3000	685×535×475	61.5/68.5
BRC-T9280D-73-PS-Q	1/8	TV×5 21#	3	6	4.2	10				●		3000	685×535×475	61.5/68.5

注 ( Note ) :

PL-简易后拖轮；PS-外置式后拖轮；BRC-T9270D-12-2PL-Q机型针距4.2mm为雨衣专用机（普通机型针距为3.5mm）。

PL : rear puller; PS : box puller; BRC-T9270D-12-2PL-Q needle gauge is 4.2mm: for sewing raincoats(3.5mm, normal needle gauge is 3.5mm).

**Contact**