一、全自动服装折叠包装机系列

1.1薄款通用型折叠包装机

1.1Thin universal folding packaging machine



FC-152A 薄款折叠撕胶封口包装机

FC-152A Thin Folding Tear Sealing Packaging Machine

设备功能:

- 山、此系列产品可完成服装左右各一次折叠、纵向一至二次折叠、自动供胶袋、自动装袋动作。
- 2、可以附加的功能部件为:自动热切封口部件、自动撕胶封口部件、自动堆叠部件。各部件可根据使用需求进行组合使用。
- 3、设备各部件的设计均按600pcs/H的速度要求进行设计,任何一种组合,整体的运行均可达到此速度。
- 4、设备输入界面为触摸屏输入界面,可以存储多达99种服装折叠、装袋、封口、堆叠运行参数,方便选用。

Device function:

- 1. This series of equipment consists of the basic model FC-M112A, which can complete the folding of the garment one by one, the vertical folding once or twice, the automatic providing of glue bag and the automatic packing action.
- 2. Additional features that can be added are: automatic hot-cut seals, automatic tear-off seals, and automatic stacking. The components can be combined in accordance with the needs of use.

- 3. The design of each component of the equipment is designed according to the speed requirement of 600pcs/h. In any combination, the overall operation can reach this speed.
- 4. The device input interface is a touch screen input interface, which can store up to 99 kinds of garment folding, packing, sealing, stacking operation parameters, and is convenient to use.

设备特点:

、设备结构设计科学、简便,可靠性高。调整、维护方便快速,简单易学。

2、设备基础机型与任意部件组合方便,在任何组合时,设备均可拆成长度2米以内运输体,工业标准电梯均可运输上下。

Device feature:

- 1. The structure of the equipment is scientific, simple and reliable. Adjustment and maintenance are convenient and fast, and easy to learn.
- 2. The basic model of the equipment is convenient to combine with any component. In any combination, the equipment can be disassembled into a transport body within 2 meters in length, and the industrial standard elevator can be transported up and down.

选配功能 Optional function

1、机器热切封口 1. Machine eagerly cutting and sealing

2、机器自动撕胶条封口 2. The machine automatically peels off the adhesive strip and seals

3、机器自动贴胶条封口 3. The machine is automatically glued and sealed

4、平口袋 4. Flat pockets

适用服装 Applicable product










薄款衣服,如T恤, Polo衫,休闲衬衫等。 Thin clothes such as T-shirts, Polo shirts, casual shirts, etc.

工作流程 Work process







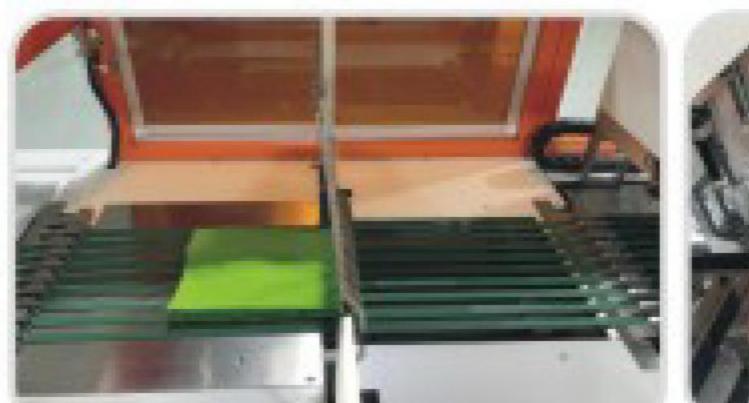





①人工放料 Manual discharge

◆ ②自动折双边 Automatic bilateral folding

③首次对折 First folding

④二次对折 Second folding

⑤自动套袋 Automatic bagging

⑥自动封口 Automatic sealing

产品参数 Product parameter

퓇号 Type	名称 name	外形尺寸(长宽高) mm Overall dimensions (length, width and height) mm	设备重量Kg Equipment weight Kg	输入电压 Input voltage
FC-152A	薄款撕胶	5480*1020*1475	1200Kg	AC220V
功率 Kw Power Kw	使用气压 MPa Use air pressure Mpa	气源排气量 Air source displacement	折前长度范围 mm Length range before folding mm	折前宽度范围 mm Width range before folding mm
2	0.5-0.7	600L/min	400-850	320-850
折后长度范围 mm Folded length range mm	折后宽度范围 mm Width after folding mm	折后高度范围 mm Height range after folding mm	胶袋长度范围 mm Plastic bag length range mm	胶袋宽度范围 mm Plastic bag width range mm
200-400	220-360	5-30	280-450	240-420

Contact